



SPECIFICATIONS

BUD-62425/BOX
BUD-62425/PLATE

- TYPE: ----- DIGITAL
- DISPLAY: ----- 6-DIGIT, 7 SEGMENT RED SUPER BRIGHT LED
- CHARACTER HEIGHT: ----- 2.5"(63.5 mm) HR./MIN. 1.8" (45.72 mm) SEC.
- VISIBILITY: ----- 150 Ft. (45.72 METERS)
- POWER REQUIREMENTS: -- 1400 ma AT 9VAC (TRANSFORMER INCLUDED)
- FRAME: ----- ALUMINUM (BLACK ANODIZED FINISH)
- DIMENSIONS: ----- 6.25" x 18.37" x 1.375" INSIDE
- WEIGHT: ----- 2.5 lbs. NO TRANSFORMER
 3.25 lbs. WITH TRANSFORMER
- OPERATING TEMP.: ----- -17° TO 185° F
- HUMIDITY: ----- 0% TO 95% NON-CONDENSING
- FUNCTION: ----- ELAPSED TIME COUNTS UP TO 99 HR. RUN/HOLD AND RESET BUTTON. DOWN TIMER RUN/HOLD AND RELOAD PLUS REAL TIME CLOCK.

SETTING INSTRUCTIONS ELAPSED TIME/REAL TIME

TO SET TIME:

1. Press and Hold SHIFT KEY approximately three seconds until the SECONDS Digit flashes.
2. Press SET KEY to set to the desired number.
3. Press the SHIFT KEY to move to the next digit.
Repeat Steps 2 and 3 until last digit is entered.
4. Press the SHIFT KEY and hold (Note all digits will be flashing)
To start time: Release the Shift key.
Note: If you make a mistake in setting, Press SHIFT and SET keys together to cancel setting.

TO SWITCH TO ELAPSED TIME:

Press both SHIFT and SET KEYS simultaneously for approximately three seconds.

NOTE: To identify the *ELAPSED TIME* mode, the LED INDICATOR is on in the upper second's display. The INDICATOR will flash when on hold.

When in *ELAPSED TIME* mode the keys become RUN/HOLD and RESET. **NOTE:** The RESET Key will only RESET when on HOLD.

TO SWITCH TO DOWN TIMER:


Press both SHIFT and SET KEYS simultaneously for approximately three seconds.

NOTE: To identify the *DOWN TIME* mode, the LED INDICATOR is on in the lower minutes display. The INDICATOR will flash when on hold.

When in *DOWN TIME* mode the keys become RUN/HOLD and RELOAD. **NOTE:** The RELOAD Key will only RESET when on HOLD.

TO RETURN TO REAL TIME:


Press both SHIFT and SET keys for approximately 3 seconds.

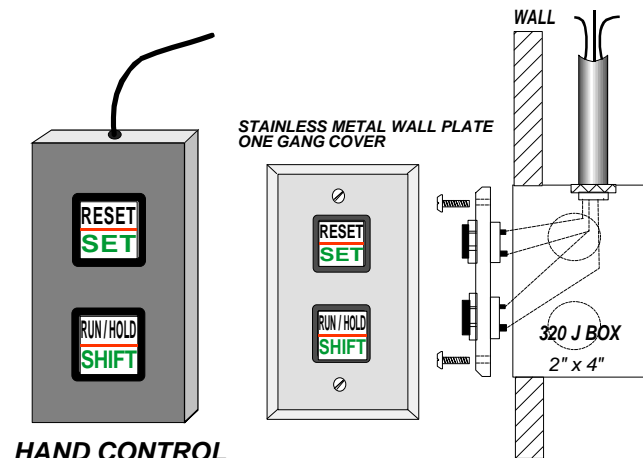

HAND CONTROL




SPECIAL ORDER




**Wall or Open
Frame Transformer**

STANDARD



TO RETURN TO REAL TIME:


Press both SHIFT and SET keys for approximately 3 seconds.

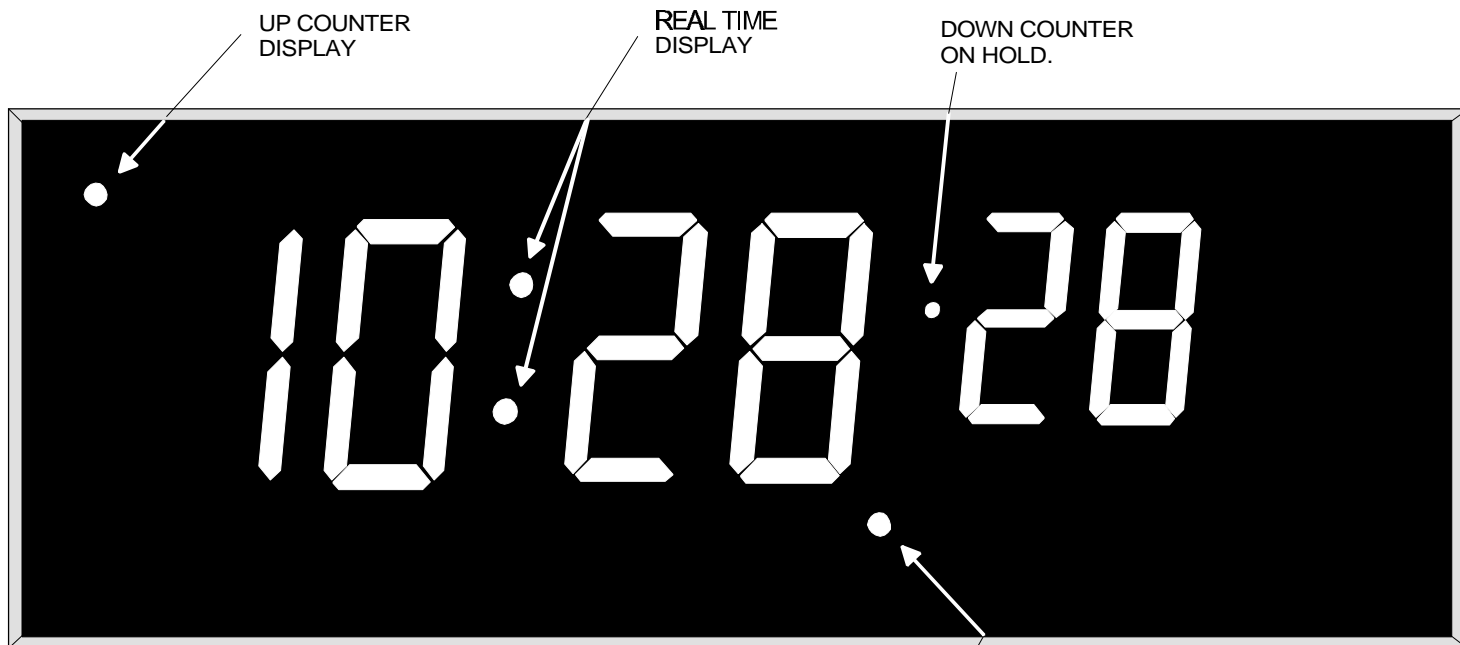

SPECIFICATIONS

BUD - 62425

- TYPE:** ----- DIGITAL
- DISPLAY:** ----- 6-DIGIT, 7 SEGMENT RED SUPER BRIGHT LED
- CHARACTER HEIGHT:** ----- 2.5" (63.5 mm) HR./MIN. 1.8" (45.72 mm) SEC.
- VISIBILITY:** ----- 150 Ft. (45.72 METERS)
- POWER REQUIREMENTS:** -- 1400 ma AT 9VAC (**TRANSFORMER INCLUDED**)
- FRAME:** ----- ALUMINUM (BLACK ANODIZED FINISH)
- DIMENSIONS:** ----- 6.25" x 18.37" x 1.375" INSIDE
- WEIGHT:** ----- 2.5 lbs. NO TRANSFORMER
3.25 lbs. WITH TRANSFORMER
- OPERATING TEMP.:** ----- -17° TO 185° F
- HUMIDITY:** ----- 0% TO 95% NON-CONDENSING

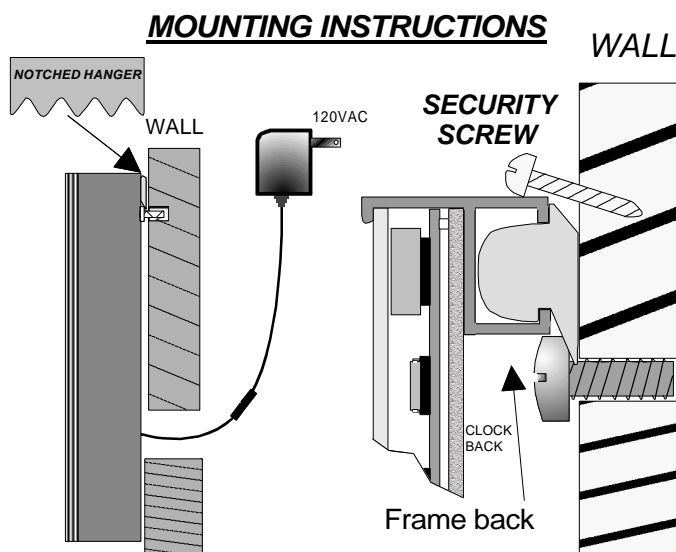

NOTE:

THE (ET) BUTTON MUST BE PRESSED FIRST

FEATURES:

REAL TIME CLOCK 12/24 HR. SELECTABLE.
COUNT UP TO 99HR. 59MIN. 59SEC.
COUNT DOWN UP FROM 99HR. 59MIN. 59SEC.
REPEAT BUTTON TO INSTANTLY RELOAD
LAST ENTERED DOWN TIME.
ONE PRESET ALARM (OPTION BUZ).
ONE ALARM AT ZERO (OPTIONBUZ).



BUD IRR INSTRUCTIONS

AT POWER UP THE DISPLAY WILL SHOW TIME , 24 HR. MODE AND RUNNING.

TO SET THE TIME PRESS THE **(ENTER)** KEY. THE DIGITS FLASH ALL ZEROS, ENTER THE TIME IN HR. MIN. SEC. PRESS THE **(ENTER)** KEY TO START THE TIME.

TO USE THE COUNT UP TIMER PRESS **(F.F.)** KEY. THE COUNT UP TIMER IS DISPLAYED. TO SET A START TIME PRESS THE **(ENTER)** KEY. DIGITS FLASH, ENTER HR. MIN. SEC. PRESS **(ENTER)** KEY TO START THE TIMER. TO RESET TIMER PRESS **(PAUSE)** KEY, PRESS **(STOP)** KEY COUNTER RESETS TO ZERO AND HOLDS. TO START TIMER PRESS **(PAUSE)** KEY . **(NOTE)** THE COUNTER CAN ONLY BE RESET IN THE HOLD MODE.


TO USE THE COUNT DOWN TIMER PRESS **(F.F.)** KEY. THE COUNT DOWN TIMER IS DISPLAYED. TO ENTER A COUNT DOWN TIME PRESS **(ENTER)** KEY, DIGITS FLASH, ENTER HR. MIN. SEC. PRESS **(ENTER)** KEY TO START COUNT DOWN. TO HOLD PRESS **(PAUSE)** KEY, TO RUN PRESS **(PAUSE)** KEY AGAIN. THE **(REC) + (PLAY)** KEYS RESTORES THE LAST ENTERED COUNT DOWN.

TO SET THE ALARM PRESS **(F.F.)** KEY. THE ALARM DISPLAY IS BLANK. TO ENTER ALARM TIME PRESS **(ENTER)** KEY, DIGITS FLASH, ENTER HR. MIN. SEC. PRESS **(ENTER)** KEY. ALARM TIME IS NOW SET. **(OPTIONAL)**.

TO SET 12/24 HR. PRESS **(F.F.)** KEY. A 12 OR 24 WILL BE DISPLAYED IN THE SECONDS SLOT. TO SET, PRESS **(ENTER)** KEY DIGITS FLASH, ENTER 12 OR 24 , PRESS **(ENTER)** KEY.

TO RETURN TO REAL TIME PRESS **(F.F.)** KEY. THE **(F.F.)** AND **(REW)** KEYS ARE USED TO WALK THROUGH THE DISPLAY MODES.

IF YOU MAKE AN ERROR AND YOU HAVE NOT HIT THE **(ENTER)** KEY TO START, HITTING THE **(STOP)** KEY WILL RESTORE THE DISPLAY TO ITS ORIGINAL VALUE.

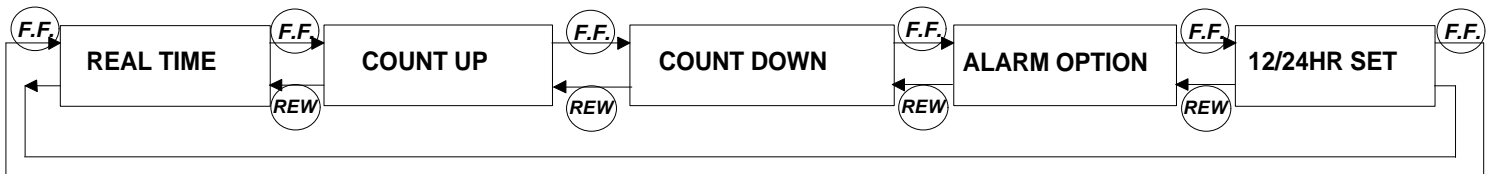

NOTE:
THE **(ET)** BUTTON MUST
BE PRESSED FIRST

